


Weatherproof Smart Ledbox 35 mm




CAUTION

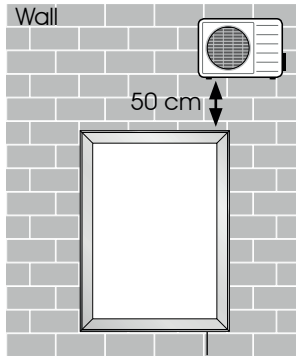


Environment temperature: min. -15°C / max. 45°C.



Mobile cable outlet, from the edge and from the back of the aluminum box.

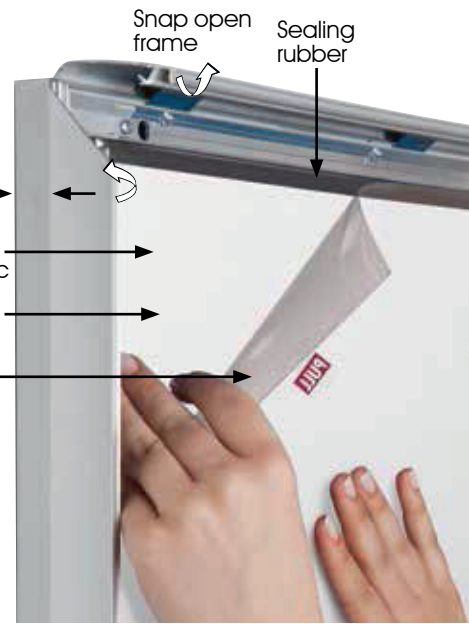

POWER SUPPLY

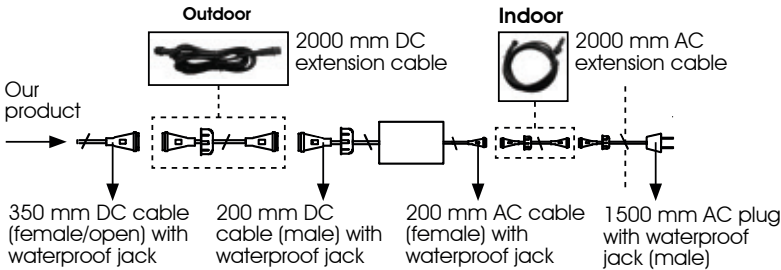

CABLE


Delivered with 2,5 meter long cable and EU plug. UK, US or CH plugs should be specified with order.



TECHNICAL SPECIFICATION

ARTICLE	POSTER	ACRYLIC THICKNESS	ILLUMINATION	POWER CONSUMPTION	POWER SUPPLY RECOMMENDED
ULS35TN0A4	210 X 297 mm	6 mm	2600-2900 LUX	12 W / 1 A	2 A
ULS35TN0A3	297 X 420 mm	6 mm	2700-3000 LUX	18 W / 1.44 A	2 A
ULS35TN0A2	420 X 594 mm	6 mm	1800-2100 LUX	23 W / 1.91 A	3 A
ULS35TN0A1	594 X 841 mm	6 mm	1600-1900 LUX	35 W / 2.83 A	4 A
ULS35TN0A0	841 X 1189 mm	6 mm	1200-1500 LUX	48 W / 4 A	5 A
ULS35TN0B2	500 X 700 mm	6 mm	1600-1900 LUX	27 W / 2.24 A	3 A
ULS35TN0B1	700 X 1000 mm	6 mm	1400-1700 LUX	41 W / 3.33 A	4 A
ULS35TN0B0	1000 X 1400 mm	6 mm	1000-1200 LUX	58 W / 4.8 A	6 A
ULS35TN023	508 X 762 mm	6 mm	1600-1900 LUX	31 W / 2.56 A	4 A
ULS35TN034	762 X 1016 mm	6 mm	1400-1700 LUX	41 W / 3.36 A	4 A
ULS35TN046	1016 X 1524 mm	6 mm	1000-1200 LUX	60 W / 5 A	6 A

HANGER

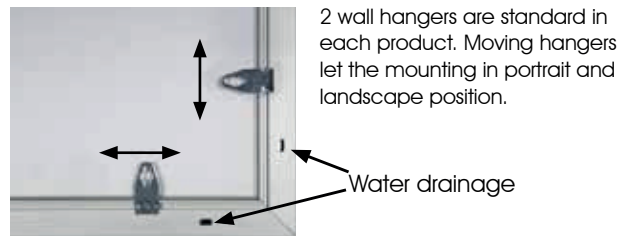

LED FEATURES (Duris E5)

Viewing angle at 50 % IV: 120°
Color: 2700 K - 6500 K (white)
CRI: Min. 80 (typ. 85)
Luminous Flux: Typ. 56 lm @ 5000 K
Luminous efficacy: Typ. 156 lm/W @ 5000 K
Luminous efficacy @ 65m A: Typ. 170 lm/W @ 5000 K
Lumen Maintenance: Testing according to IESNA LM-80 in progress
Life Time : 50.000 Hours



ASSEMBLY SHEET

