



Noticeboard with LED Light

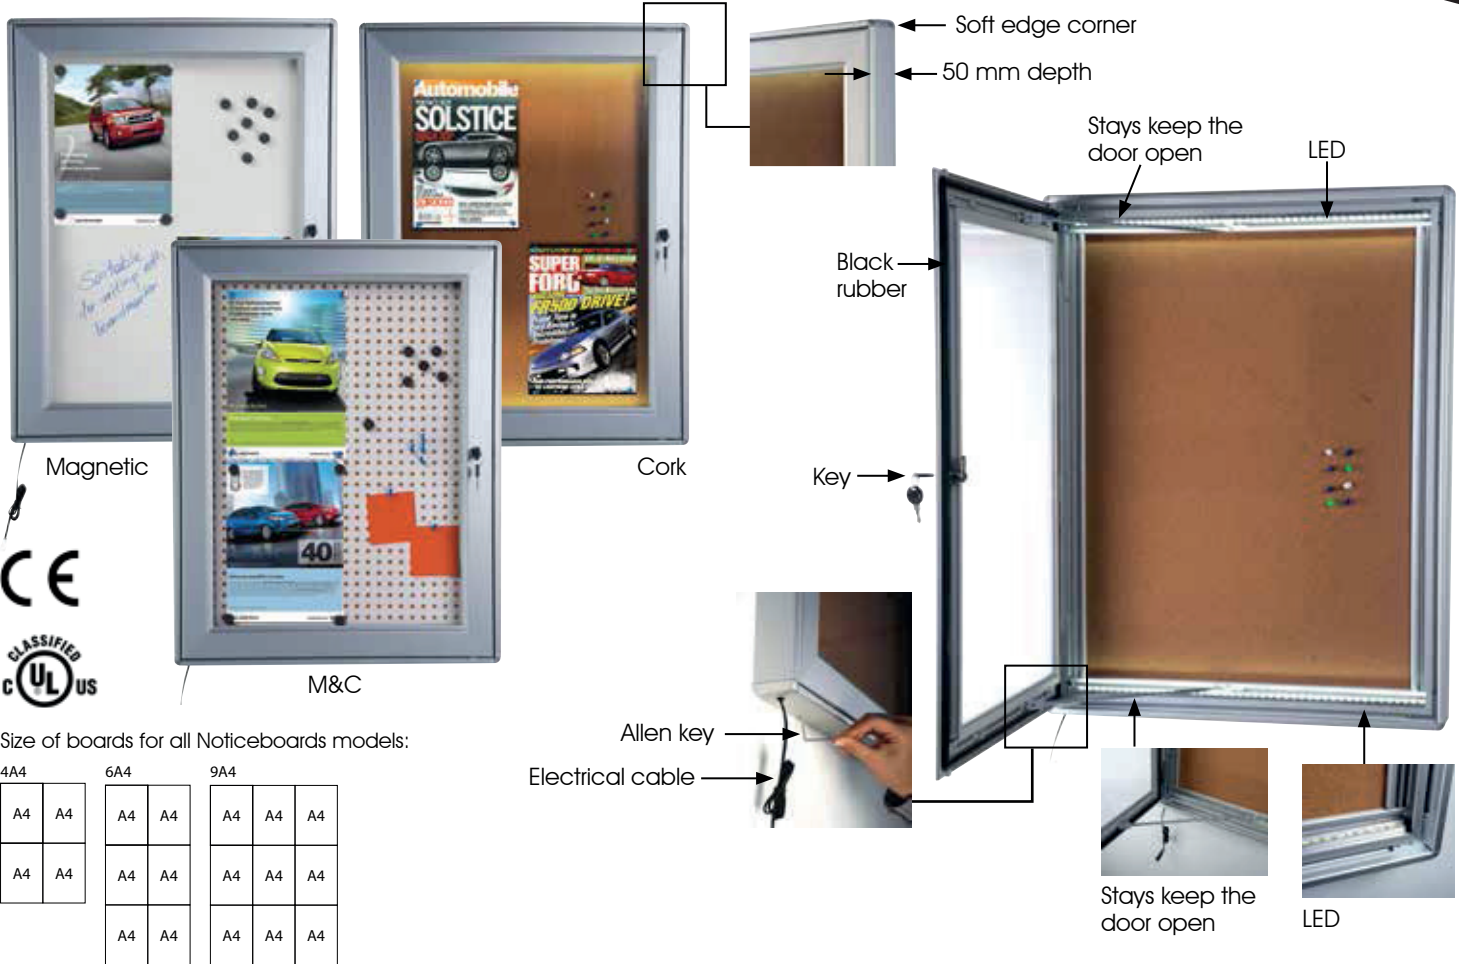

Size of boards for all Noticeboards models:

4A4		6A4		9A4		
A4	A4	A4	A4	A4	A4	A4
A4	A4	A4	A4	A4	A4	A4
		A4	A4	A4	A4	A4

CAUTION

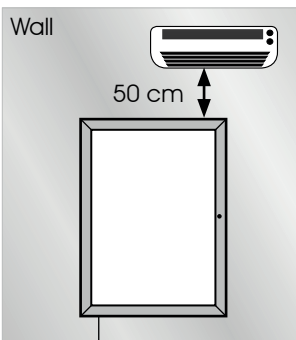

35°C Indoor maximum temperature (incl. daily sunny hours.) It should be assembled 30 cm from the window.

POWER SUPPLY


- 12 V DC
- Complete with power supply
- 2 year guaranteed
- 7/16 use
- If 7/24 use required, please order individually.

FEATURES

- Suitable for outdoor use
- Improved Led technology for improved luminance.
- Pre-treated light guided panel diffuses light even & powerful.
- Saves up to 60% energy costs.
- CE certificate provided..


CABLE

Delivered with 2,5 meter long cable and EU plug. UK, US or CH plugs should be specified with order. Extension cable: 1 mm, 2 mm, 3 mm.



HANGER

2 wall hangers are standard in each product. Moving hangers let the mounting in portrait and landscape position.

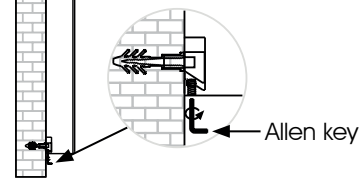

LED FEATURES (Duris E5)

Viewing angle at 50 % IV: 120°
Color: 2700 K - 6500 K (white)
CRI: Min. 80 (typ. 85)
Luminous Flux: Typ. 56 lm @ 5000 K
Luminous efficacy: Typ. 156 lm/W @ 5000 K
Luminous efficacy @ 65m A: Typ. 170 lm/W @ 5000K
Lumen Maintenance: Testing according to IESNA LM-80 in progress
Life Time : 50.000 Hours



TECHNICAL SPECIFICATION

CORK	MAGNETIC	M&C	CAPACITY	POWER CONSUMPTION	POWER SUPPLY RECOMMENDED
UNBN0L04A4	UNBN1L04A4	UNBN2L04A4	4 X A4	24 W / 2 A	3 A
UNBN0L06A4	UNBN1L06A4	UNBN2L06A4	6 X A4	24 W / 2 A	3 A
UNBN0L09A4	UNBN1L09A4	UNBN2L09A4	9 X A4	34.56 W / 2.88 A	4 A

ASSEMBLY SHEET

